

L Slot Circularly Polarized Broadband Antenna

Meenakshi Saini¹, Nitin Kathuria², V.K. Pandey³

¹M.Tech. Student, Dept. of Electronics & Communication, NIET, Greater Noida

^{2,3}Dept. of Electronics & Communication, AIMT, Greater Noida

meenakshisaini07@gmail.com


Abstract—A single-fed circularly polarized (CP) patch antenna is designed and built using L-slot loaded patch technique. The antenna is designed on a high dielectric constant ($\epsilon_r = 10.02$) substrate which achieves a reasonable bandwidth and axial ratio bandwidth with respect to a U slot antenna. At the operating frequency of 1.575 GHz with the size of the patch is 25mm X 25mm, while ground plane of 60mm X 60mm and the thickness of the substrate is 9.12mm. Bandwidth is enhanced to 18.42% and Axial Ratio Bandwidth by 4% by this design. The other Parameters of antenna like return loss and radiation pattern are also analyzed using HFSS software.

Key Words—Circularly polarized (CP), patch antenna, L-slot

I. INTRODUCTION

Microstrip Patch Antenna (MSA) has several advantages such as simple structure, low profile and low cost, it is often used in various applications. One of the disadvantages of the traditional MSA is its poor impedance-bandwidth. The bandwidth enhancement techniques for the MSA, the MSAs with parasitic elements, and the L-shaped probe-fed MSA are well known [1]. With the rapid development of the satellite communication and positioning system, more and more consideration has been paid to circularly polarized (CP) antennas. The Global Positioning Satellite (GPS) system operates at 1575 and/or 1227 MHz with RHCP signals [2]. Antennas which operate on both the frequencies are preferred to address additional and demanding applications requirements. Circularly polarized antenna is well-known for its feature of relative insensitivity to transmitter and receiver orientations. CP radiation is generated when two degenerate orthogonal linearly polarized modes, of equal amplitude and 90° phase difference, are independently excited. Patch antenna is one attractive candidate for producing circular polarization owing to its characteristics of wide bandwidth, high gain, low profile and low cost. For a single feed patch antenna, truncating a pair of corners and cutting a diagonal slot are two conventional ways to generate CP radiation. However, narrow axial ratio bandwidths of less than 1% are normally obtained. To enhance the CP bandwidth, some techniques, such as a probe-fed corner truncated

patch with L-shaped slot with ground plane, a meandering probe truncated corners stacked patch antenna, and L-shaped probe-fed patch antenna with a cross slot were proposed respectively[3]. If the patch shape is like the square or the circle, the bandwidth is the same and proportional to its size. The deviations start when the shape changes drastically and becomes a narrow or wide rectangle. If the radiation edge becomes narrow, decreases the radiation loss and increases the antenna Q, reducing the bandwidth. For a patch with a large radiating edge, the reverse is true [4]. In general, the advantages and drawbacks of patch antennas with high permittivity substrate are a controversial problem and some interesting results. In this paper we have performed an exploration on patch antennas built on a high permittivity substrate [5]. To obtain the high bandwidth a fork-like L-probe is used. The dimension of the patch as well as the position of the probe feed is optimized leading to a wideband circular polarized behavior [6].

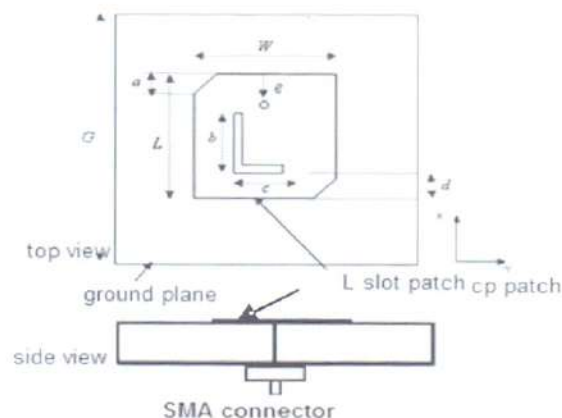

Parameter	a	b	c	d	e	h	G	L	W	ϵ_r
Unit(mm)	6	10	10	7	2	9.12	60	25	25	10.02

Fig. 1 Geometry of the antenna

II. ANTENNA GEOMETRY AND DESIGN

The antenna geometry is shown in Fig. 1. This antenna is designed to operate at around 1.575 GHz. The truncated square patch of length and width is printed on a microwave substrate (with dielectric constant 10.02) for exciting two orthogonal modes for CP radiation. A L-shaped slot (with 1-mm width) is cut in the truncated

patch. The function of the L-slot is to introduce a capacitance that can suppress the inductance due to the vertical feeding probe so as to enhance the impedance bandwidth. The feeding probe is connected to an SMA launcher that is mounted underneath the ground plane. As discussed, L-slot enables the use of thicker substrates to obtain larger impedance bandwidth. The total height of the dielectric is 9.12 mm, and the dielectric is made up of six layers of thin substrates. Designing and simulation is performed by using high frequency simulation software (HFSS).

III. RESULTS

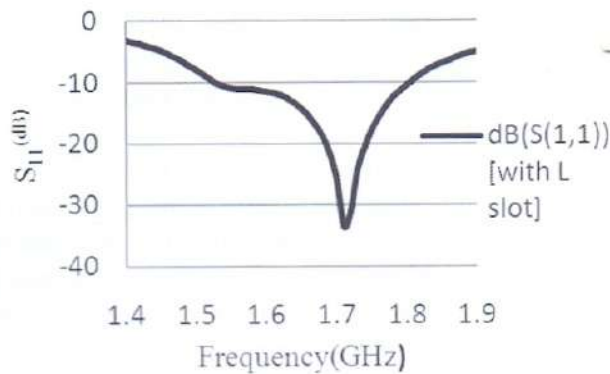


Fig. 2 Simulated return loss

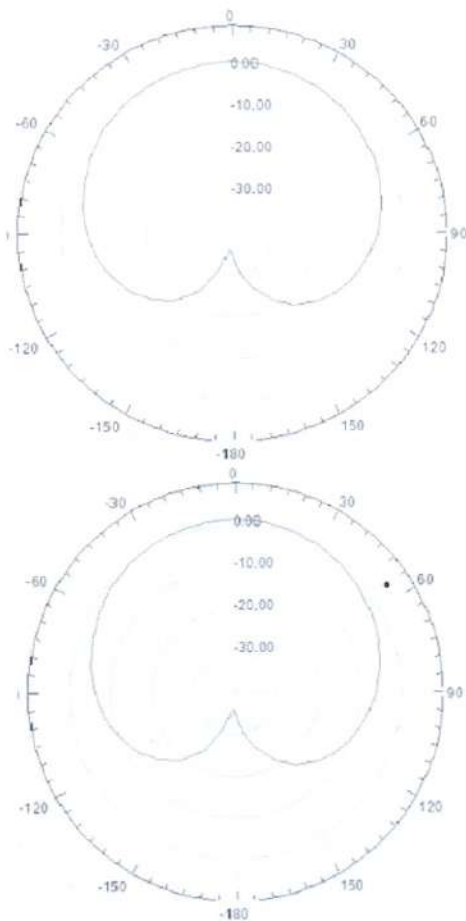


Fig.3 LHCP Radiation pattern at 1.575 GHz ($\Theta=90^\circ, 0^\circ$)

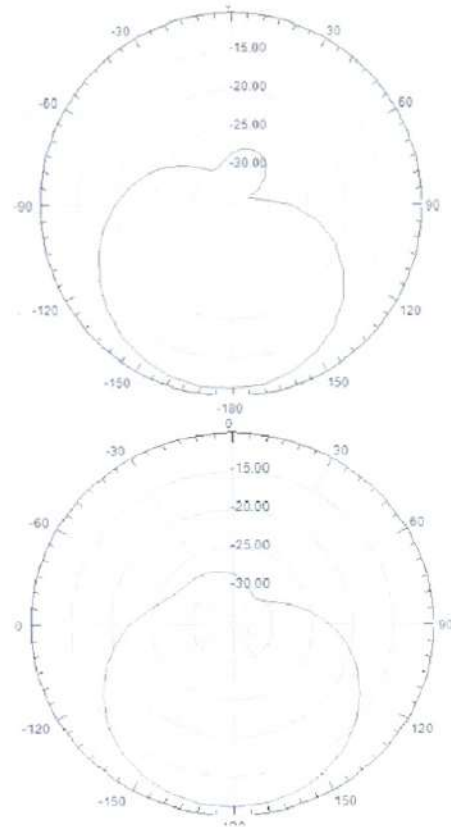


Fig. 4 RHCP Radiation pattern at 1.575 GHz ($\Theta=90^\circ, 0^\circ$)

The measured return loss is shown in Fig.2. The impedance bandwidth is 18.5% with 10 dB between 1.52–1.80 GHz.

Fig. 3 and Fig. 4 show the measured radiation patterns at 1.575 GHz. The 3-dB beam widths are 92° and 90° in $\Theta=90^\circ$ and $\phi=0^\circ$ planes respectively. It can be observed that in the plane, the cross polarization is 25 dB below the copolarization above the ground plane. In the plane, it is 25 dB below the copolarization. Referring to the operating frequency of 1.575 GHz, the patch dimensions are about 25X25 square patches and the substrate thickness is about 9.12mm. For real application of GPS, the receiving antenna should be designed as a right-hand circularly polarized (RHCP) antenna. In this design, it is easy to adjust the antenna with RHCP operation by changing the truncated corner of the patch to another diagonal axis[7].

IV. SIMULATION

This simulation is carried out by using an electromagnetic (EM) commercial software tool, HFSS. For small antenna design, the size of the ground plane is a very important parameter to be considered. In this section, a study for an impedance bandwidth response with different ground plane sizes is carried out. (For this

simulation, the size of the ground plane is equal to the substrate size). The square-shaped ground plane with a length varied from 40 to 60 mm is investigated.

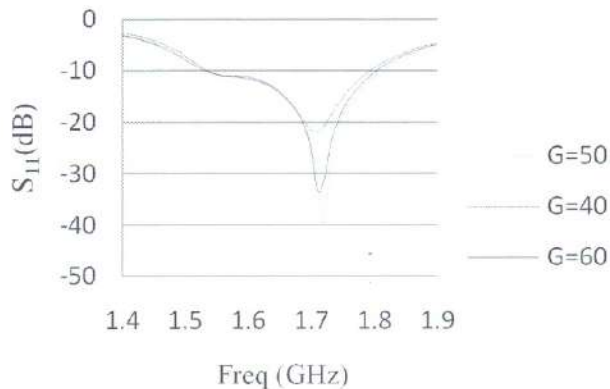


Fig. 5 Measured return loss with different size of ground plane with L slot

Fig. 5 depicts the return loss responses for the L-slot CP antenna with different ground plane sizes. The result indicates that when the size of the ground plane is too small, the impedance bandwidth of this antenna would significantly reduce. When Ground plane is 60 mm the impedance bandwidth is 18.5% whereas, the bandwidth decreases for 40 mm Ground plane.

Fig. 6 illustrates responses of the AR with different ground plane sizes. When $G=60$ mm, the minimum value of the axial ratio for the antenna is maximum. However, if the ground plane size is reduced, the value of AR is deteriorated. For the antenna gain, a smaller ground plane size would also cause the decrease in gain. Since L-slot loaded technique is employed for improving the bandwidth performance for a small CP antenna, a study of changing the values of L-slot parameters are carried out to show the effect of the L-slot in the CP antenna. Two parameters b and c are investigated.

Fig.7 shows the impedance bandwidth response with different and fixed $b=10$ mm. For this antenna, when the value of b is selected between 8–12 mm, the antenna has good and wide bandwidth characteristic. However, as b is increased ($b>12$) mm, the overall impedance bandwidth is deteriorated as considerable mismatch occurred.

Fig.8 shows the impedance bandwidth response with different c and fixed $b=10$ mm. The value of c is varied from 9 to 12 mm. It is observed that it cannot be either too small or large; otherwise the antenna would have a narrow impedance bandwidth.

Finally, a comparison for a CP antenna with L/with U-slot is given in Table 1 and shown in Fig.9. The simulated return loss and axial ratio for CP antenna is measured and reported.

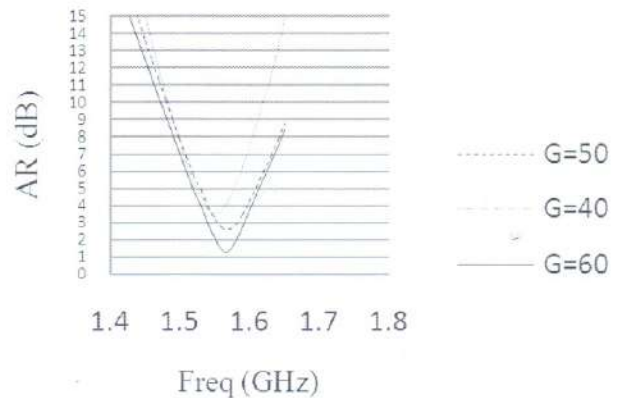


Fig.6 Axial ratio with different size of ground plane

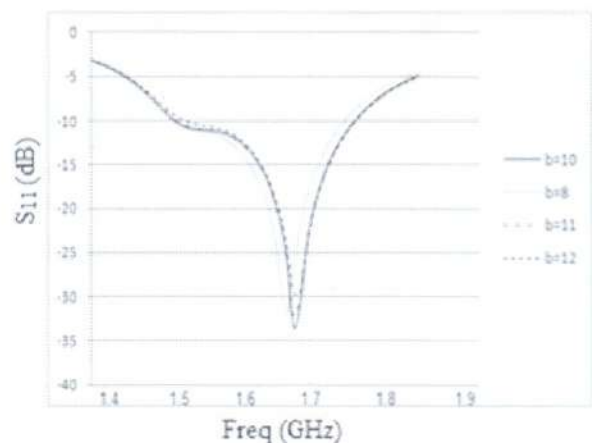


Fig. 7 Simulated Return loss with different size of b

It is observed that the presence of L-slot gave a significant bandwidth enhancement in the impedance bandwidth but only less improvement in the axial ratio bandwidth. However, since a thick substrate is employed in the proposed CP antenna, the absence of the L-slot would generate very high inductance from the feeding probe and would causes the impedance bandwidth and axial ratio bandwidth not to overlap. For a CP antenna, the usable bandwidth is the range of frequencies for $s_{11} \leq 10$ dB. Therefore, if the patch antenna is designed using thick substrate material, the use of the L-slot loaded technique can provide bandwidth enhancement, but also ensure both axial ratio and impedance bandwidth to overlap.

V. CONCLUSION

A miniature circularly polarized patch antenna has been designed which consists of one L-slot square patch with truncated corners supported by a substrate with dielectric constant of 10.02 for achieving small size. The operating frequency, square patch size, ground plane size and thickness of substrate are 1.575 GHz, 25X25, 60X60, 9.12mm successively. Measured results show that this single-feed CP patch antenna attains bandwidth of 18.42% in the frequency range 1.52–1.80 GHz and axial ratio bandwidth is 4%, which is within the impedance bandwidth. This small antenna can be used for a number of wireless communication applications, including GPS receivers.

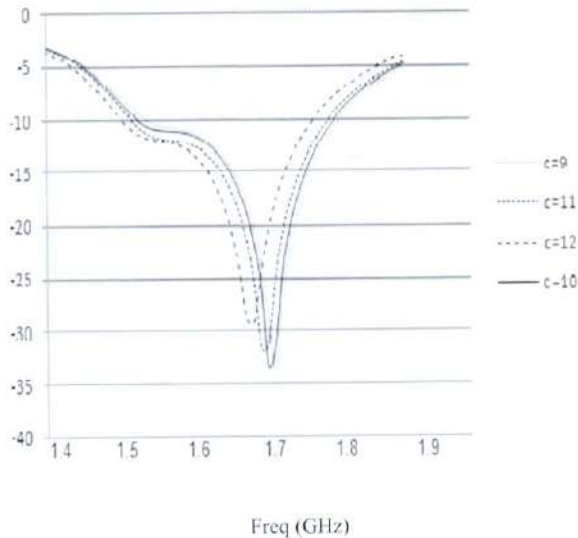


Fig.8 Simulated return loss with different size of ground plane

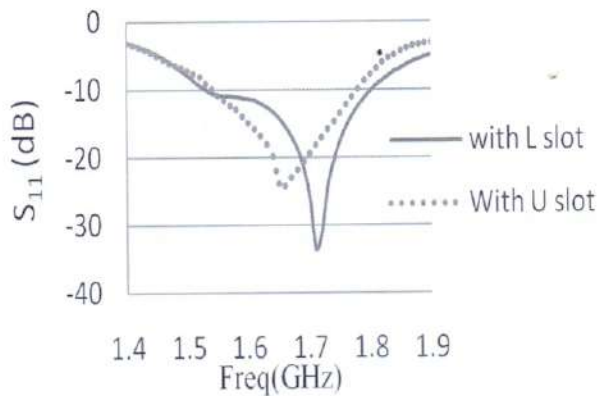


Fig.9 Comparison of return loss with different U/L slot

TABLE I. Summary for simulated Impedance Bandwidth and Axial Ratio Bandwidth for CP antenna with U slot and L slot

CP Antenna	Imp. BW ($S_{11} \leq -10$ dB)	AR BW ($AR \leq 3$ dB)
With U Slot	15.11% 1.53GHz to 1.78 GHz	3.16% 1.56 GHz 1.61 GHz
With L Slot	18.42% 1.52 GHz to 1.80 GHz	4% 1.53 GHz to 1.59 GHz

REFERENCES

- [1] Takashi Yanagi, Yasuhiro Nishioka, Masataka Ohtsuka, and Shigeru Makino, "Basic Study on Wideband Microstrip Patch Antenna Incorporating Matching-Stubs onto Patch Conductor" IEEE, PP.885-888, 07/2007.
- [2] Xiaoye Sun, Zhijun Zhang, Zhenghe Feng, "Dual-Band Circularly Polarized Stacked Annular-Ring Patch Antenna for GPS Application", IEEE Antennas And Wireless Propagation 49-52 Letters, VOL. 10, pp 2011
- [3] Can-Hui Chen and E. K. N. Yung "A Novel Unidirectional Dual-Band Circularly-Polarized Patch Antenna", IEEE Transactions On Antennas And Propagation, Vol. 59, NO. 8, pp, 3052-3057, August 2011
- [4] Zarreen Aijaz & S.C. Shrivastava, "Effect of the Different Shapes: Aperture Coupled Microstrip Slot Antenna" International Journal of Electronics Engineering, 2(1), pp. 103-105, 2010.
- [5] D. D. Sandu, O. Avadanei, A. Ioachim, G. Banciu, P. Gasner, "Microstrip Patch Antenna With Dielectric Substrate", Journal of Optoelectronics and Advanced Materials Vol. 5, No. 5, pp. 1381 - 1387, 2003
- [6] M. Pirai and H. R. Hassani, "L-Probe Fed Circular Polarized Wideband Planar Patch Antenna On Cylindrical Structure, Progress In Electromagnetics Research C, Vol. 3, 161-167, 2008.
- [7] Ka Yan Lam, Kwai-Man Luk, Kai Fong Lee, Hang Wong, and Kung Bo Ng, "Small Circularly Polarized U-Slot Wideband Patch Antenna", IEEE Antennas And Wireless Propagation Letters, Vol. 10, pp 88-90, 2011.



Meenakshi Saini was born in Roorkee India, in 1982. She received Engg. Diploma in Electronics Engineering from GGPS College, Shamli. She received the A.M.I.E degree in electronics and communication engineering from the Institution of Engineers Kolkata, India, in 2009, and the M.Tech. Degree in Telecommunication engineering from the Uttar Pradesh Technical University UP, India, in 2014. She has worked as an Electronics Engineer in Research Development department at Balaji Telecom Solutions (Roorkee) from April 5, 2005 to May 10, 2006. She is also having one year apprenticeship in maintenance of electronics apparatus & computer work of BHEL (Haridwar) from Feb 18th, 2004 to Feb 17th 2005.



Nitin Kathuria received his B.E. degree in Electronics & Telecommunication from J.T.Mahajan College of Engineering, under North Maharashtra University in 2004, the M.E. degree in Communication & Information from Griffith University, Brisbane, Australia, in 2007. He was joined teaching as a lecturer in the Department of Electronics & Communication, Moradabad in 2009-10. Presently he is an Assistant

Professor in Department of Electronics & Communication at Accurate Institute of Technology & Management Communication, Greater NOIDA, UP, India. His research interests include Antenna Design & Microwave Engineering. At present he is actively engaged in design and analysis of Ultra Wideband Antennas.



V K Pandey graduated in Electronics Engineering from The University of Poona in 1990. He obtained M.E. (Control & Instrumentation) with honors from Delhi University in 1997. He received his Ph.D (Electronics Engineering) degree from I.T. BHU Varanasi in 2006. At present he is working as Professor in Electronics & Communication Engineering Department. He received a grant of Rs. 14.5 lacs under MODROB scheme from AICTE, New Delhi for establishing Project and Research laboratory in the Department of Electronics and Communication.

Prof. Pandey has around 23 years experience, teaching under graduate and post graduate classes. His field of research is Microwave Engineering. He has published around 25 research papers in International/National journals and conferences of repute.